

SP-SL-3D-84


Sponde Metalliche SLIM ammortizzate* con regolazione 3D - H.84

Slim Metal Boxes with soft closing and 3D adjustment - H.84*

*Disponibile versione con guide con apertura a spinta e barra stabilizzatrice (SP-HL-3D)
Also available with Push-to-Open slides and synchronized rob (SP-HL-3D)


Specifiche	
Estrazione:	Totale sincronizzata
Chiusura:	Ammortizzata
Portata:	45 Kg
Durata:	Oltre 50.000 cicli
Finitura guida:	Zincata
Specifications	
Extention:	Full Synchronized
Closing:	Soft
Load Rating:	45 Kg
Cycling:	Over 50.000 times
Slide Finishing:	Galvanized

Finitura sponda	Slim box finishing
	Grigio antracite / Dark grey
	Grigio chiaro / Light grey
	Bianco / White

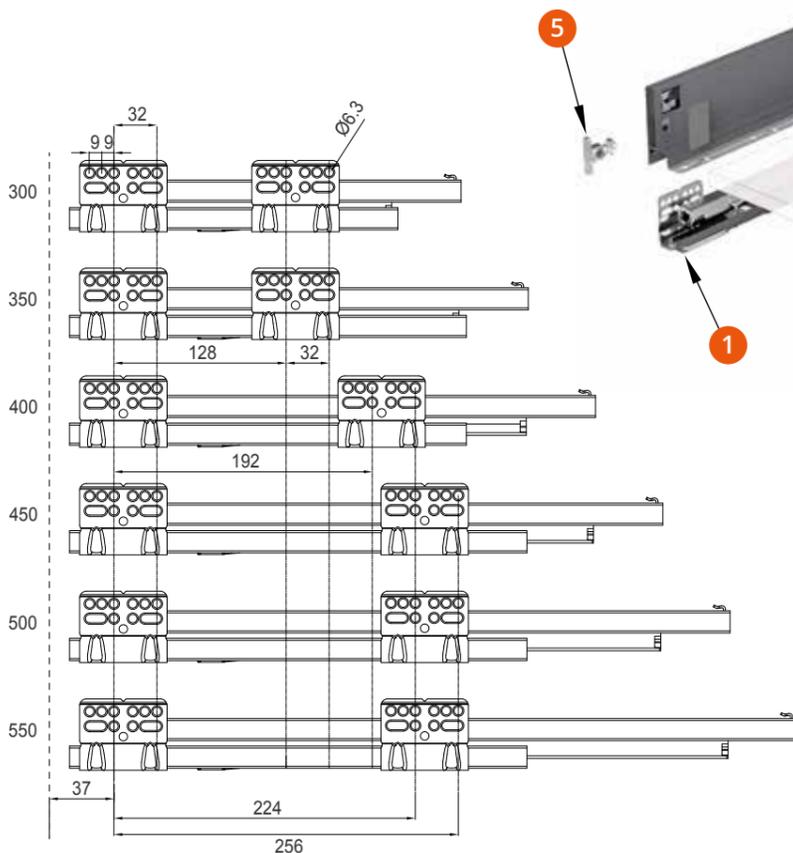


Componenti	Components
1	Guide / Under-mounted slides
2	Sponde / Slim boxes
3	Placchette / Plastic plates
4	Supporti retro / Back panel supports
5	Supporto frontale / Front panel support

Dimensioni per montaggio frontale Drawer front panel assembling diagram

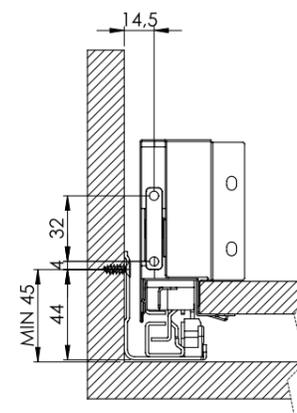


Vista frontale / Front view

Dimensioni ingombro cassetto e retro Drawer and back panel overall dimensions

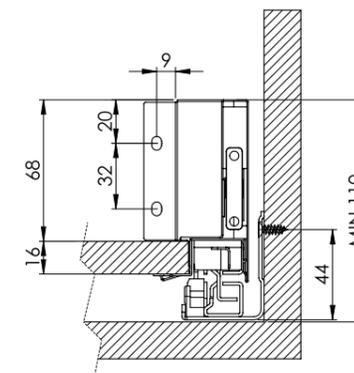


Vista retro / Back view

Dimensioni fondo e retro Bottom and back panel dimensions

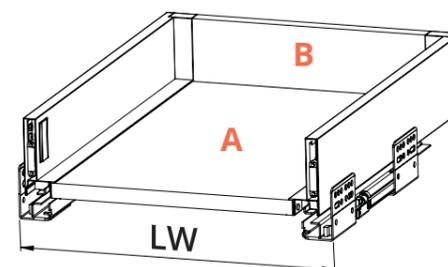

LW=Larghezza interna mobile
LW=Cabinet inner width


Fondo / Bottom panel




Retro / Back panel



Pannello spessore: 16 mm
Panel thickness: 16 mm

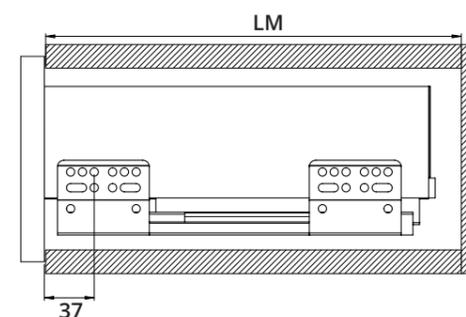

Foratura fianco con frontale a battuta
Side panel hole drilling with outer drawer front

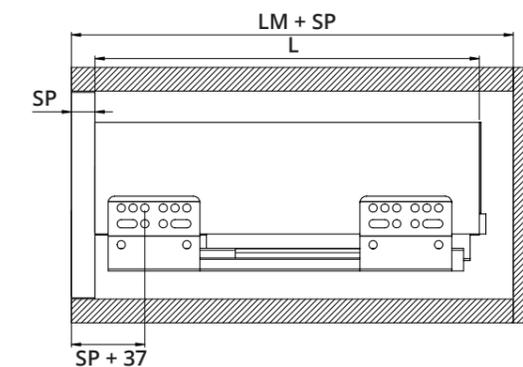

Foratura fianco con frontale interno
Side panel hole drilling with inner drawer front

Codice Code	Finitura sponda Slim box finishing	L	LM
SP-SL-84 L 30 - 3D		300	310
SP-SL-84 L 35 - 3D		350	360
SP-SL-84 L 40 - 3D		400	410
SP-SL-84 L 45 - 3D		450	460
SP-SL-84 L 50 - 3D		500	510
SP-SL-84 L 55 - 3D		550	560


SP-SL-3D-116

Sponde Metalliche SLIM ammortizzate* con regolazione 3D - H.116 Slim Metal Boxes with soft closing* and 3D adjustment - H.116

*Disponibile versione con guide con apertura a spinta e barra stabilizzatrice (SP-HL-3D)
Also available with Push-to-Open slides and synchronized rob (SP-HL-3D)


Specifiche	
Estrazione:	Totale sincronizzata
Chiusura:	Ammortizzata
Portata:	45 Kg
Durata:	Oltre 50.000 cicli
Finitura guida:	Zincata
Specifications	
Extention:	Full Synchronized
Closing:	Soft
Load Rating:	45 Kg
Cycling:	Over 50.000 times
Slide Finishing:	Galvanized

Finitura sponda	Slim box finishing
	Grigio antracite / Dark grey
	Grigio chiaro / Light grey
	Bianco / White

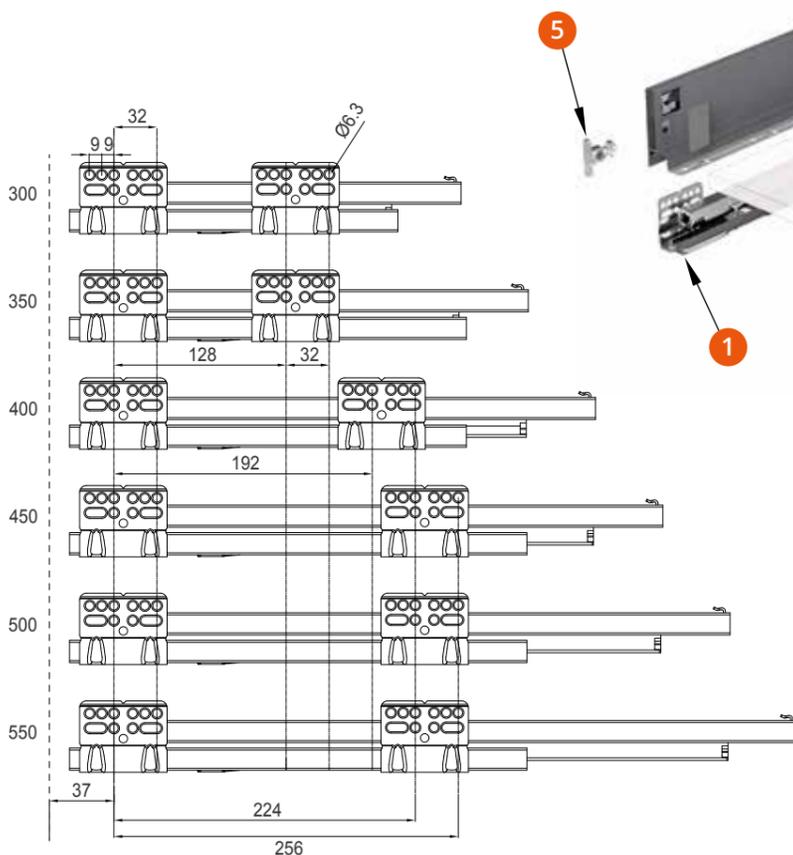


Componenti	Components
1	Guide / Under-mounted slides
2	Sponde / Slim boxes
3	Placchette / Plastic plates
4	Supporti retro / Back panel supports
5	Supporto frontale / Front panel support

Dimensioni per montaggio frontale
Drawer front panel assembling diagram

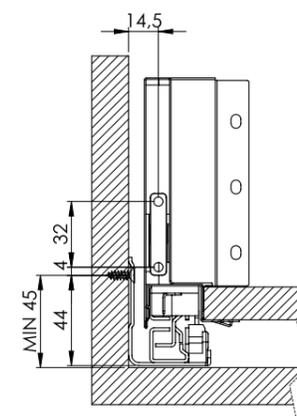


Vista frontale / Front view

Dimensioni ingombro cassetto e retro
Drawer and back panel overall dimensions

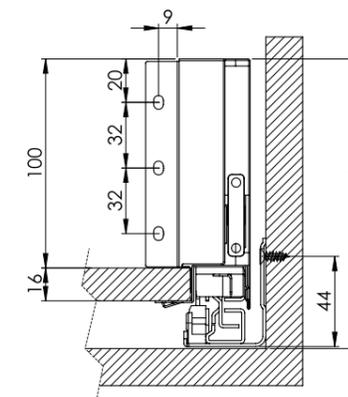


Vista retro / Back view

Dimensioni fondo e retro
Bottom and back panel dimensions

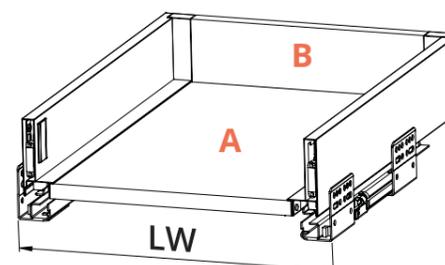

LW=Larghezza interna mobile
LW=Cabinet inner width


Fondo / Bottom panel




Retro / Back panel



Pannello spessore: 16 mm
Panel thickness: 16 mm

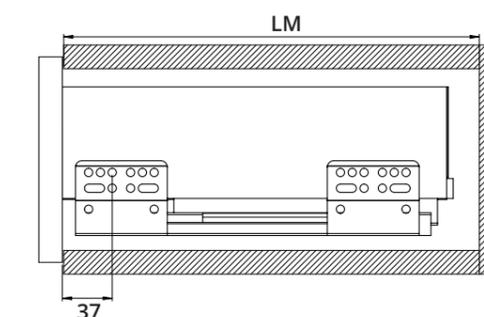

Foratura fianco con frontale a battuta
Side panel hole drilling with outer drawer front

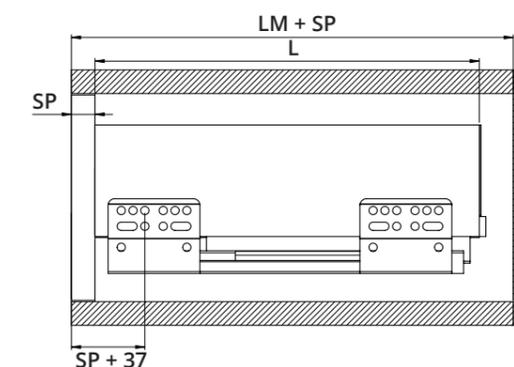

Foratura fianco con frontale interno
Side panel hole drilling with inner drawer front

Codice Code	Finitura sponda Slim box finishing			L	LM
SP-SL-116 L 30 - 3D				300	310
SP-SL-116 L 35 - 3D				350	360
SP-SL-116 L 40 - 3D				400	410
SP-SL-116 L 45 - 3D				450	460
SP-SL-116 L 50 - 3D				500	510
SP-SL-116 L 55 - 3D				550	560

SP-SL-3D-167


Sponde Metalliche SLIM ammortizzate* con regolazione 3D - H.167

Slim Metal Boxes with soft closing and 3D adjustment - H.167*

*Disponibile versione con guide con apertura a spinta e barra stabilizzatrice (SP-HL-3D)
Also available with Push-to-Open slides and synchronized rob (SP-HL-3D)


Specifiche	
Estrazione:	Totale sincronizzata
Chiusura:	Ammortizzata
Portata:	45 Kg
Durata:	Oltre 50.000 cicli
Finitura guida:	Zincata
Specifications	
Extention:	Full Synchronized
Closing:	Soft
Load Rating:	45 Kg
Cycling:	Over 50.000 times
Slide Finishing:	Galvanized

Finitura sponda	Slim box finishing
	Grigio antracite / Dark grey
	Grigio chiaro / Light grey
	Bianco / White

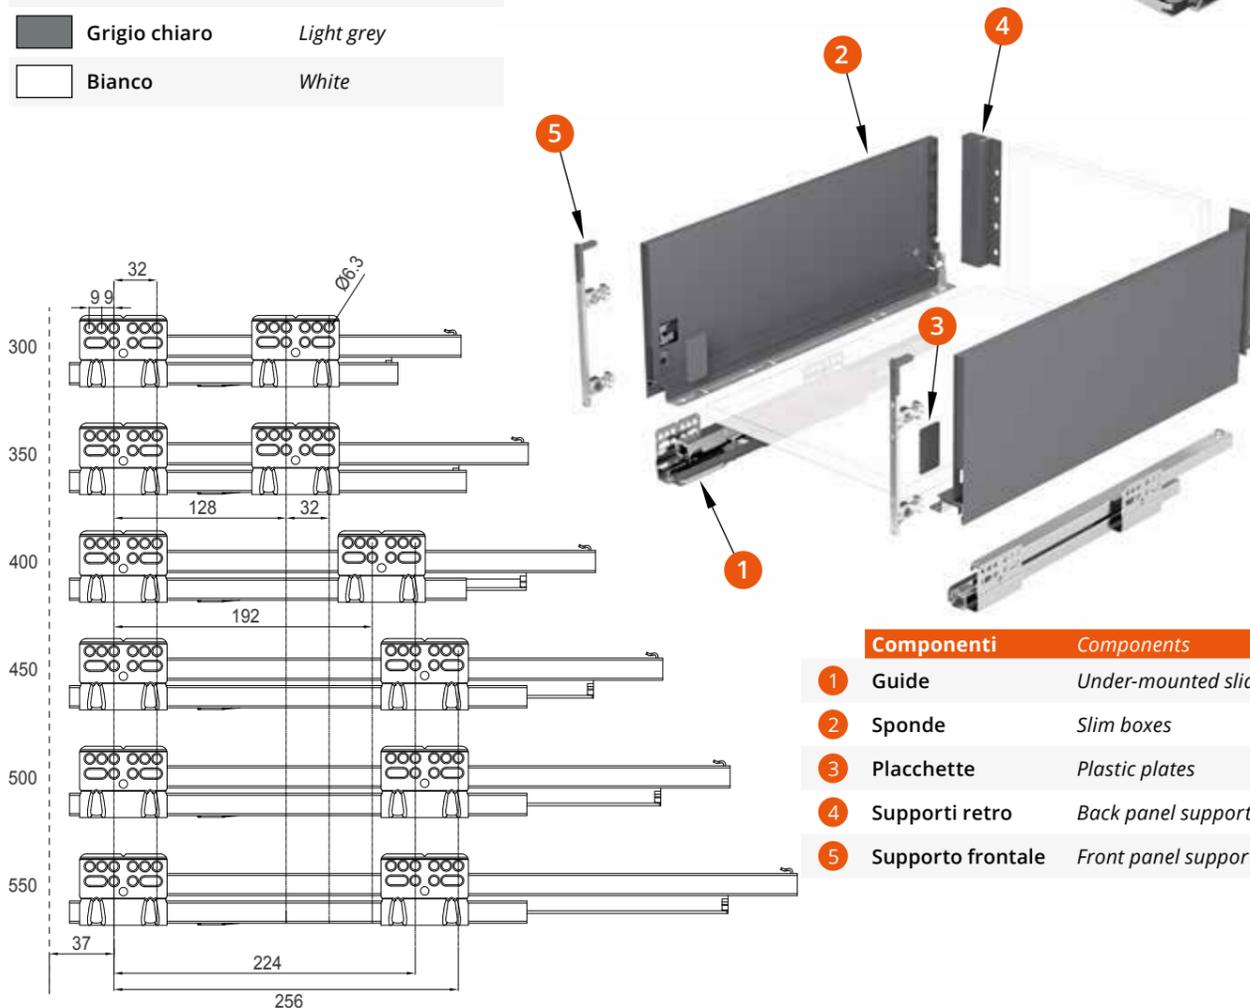


Componenti	Components
1	Guide / Under-mounted slides
2	Sponde / Slim boxes
3	Placchette / Plastic plates
4	Supporti retro / Back panel supports
5	Supporto frontale / Front panel support

Dimensioni per montaggio frontale
Drawer front panel assembling diagram

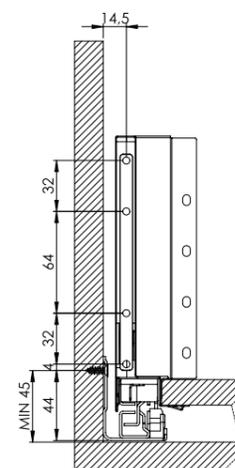


Vista frontale / Front view

Dimensioni ingombro cassetto e retro
Drawer and back panel overall dimensions

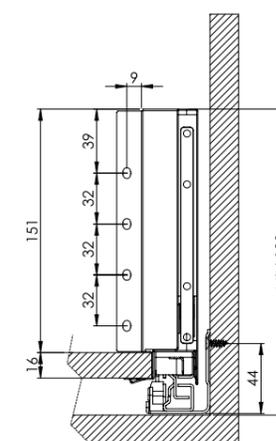


Vista retro / Back view


Dimensioni fondo e retro
Bottom and back panel dimensions

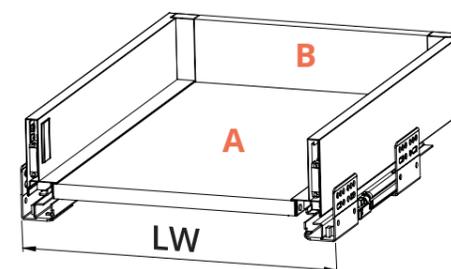

LW=Larghezza interna mobile
LW=Cabinet inner width




Fondo / Bottom panel




Retro / Back panel

Pannello spessore: 16 mm
Panel thickness: 16 mm

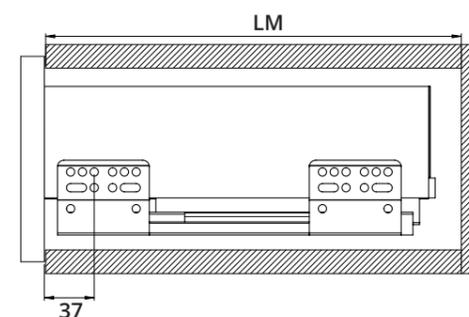

Foratura fianco con frontale a battuta
Side panel hole drilling with outer drawer front

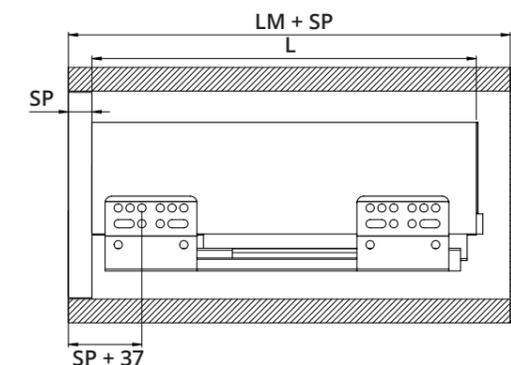

Foratura fianco con frontale interno
Side panel hole drilling with inner drawer front

Codice Code	Finitura sponda Slim box finishing			L	LM
SP-SL-167 L 30 - 3D				300	310
SP-SL-167 L 35 - 3D				350	360
SP-SL-167 L 40 - 3D				400	410
SP-SL-167 L 45 - 3D				450	460
SP-SL-167 L 50 - 3D				500	510
SP-SL-167 L 55 - 3D				550	560

SP-SL-3D-199


Sponde Metalliche SLIM ammortizzate* con regolazione 3D - H.199

Slim Metal Boxes with soft closing and 3D adjustment - H.199*

*Disponibile versione con guide con apertura a spinta e barra stabilizzatrice (SP-HL-3D)
Also available with Push-to-Open slides and synchronized rob (SP-HL-3D)


Specifiche	
Estrazione:	Totale sincronizzata
Chiusura:	Ammortizzata
Portata:	45 Kg
Durata:	Oltre 50.000 cicli
Finitura guida:	Zincata
Specifications	
Extention:	Full Synchronized
Closing:	Soft
Load Rating:	45 Kg
Cycling:	Over 50.000 times
Slide Finishing:	Galvanized

Finitura sponda	Slim box finishing
	Grigio antracite / Dark grey
	Grigio chiaro / Light grey
	Bianco / White

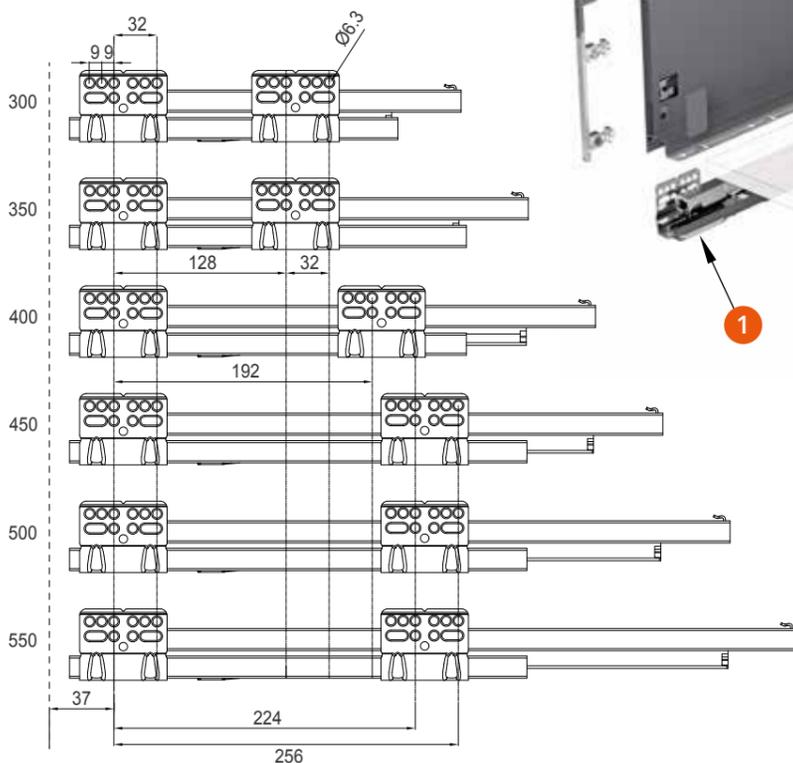


Componenti	Components
1	Guide / Under-mounted slides
2	Sponde / Slim boxes
3	Placchette / Plastic plates
4	Supporti retro / Back panel supports
5	Supporto frontale / Front panel support

Dimensioni per montaggio frontale
Drawer front panel assembling diagram

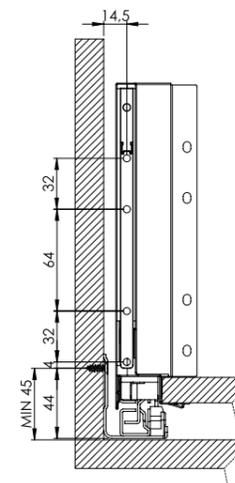


Vista frontale / Front view

Dimensioni ingombro cassetto e retro
Drawer and back panel overall dimensions

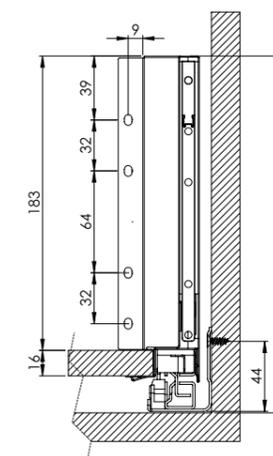


Vista retro / Back view


Dimensioni fondo e retro
Bottom and back panel dimensions

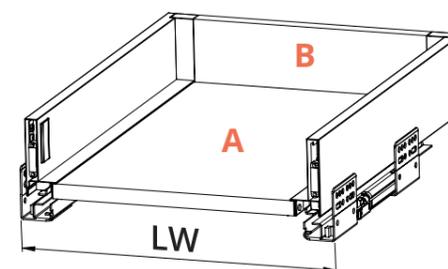

LW=Larghezza interna mobile
LW=Cabinet inner width




Fondo / Bottom panel




Retro / Back panel

Pannello spessore: 16 mm
Panel thickness: 16 mm

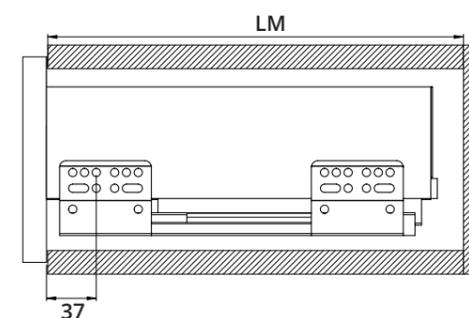

Foratura fianco con frontale a battuta
Side panel hole drilling with outer drawer front

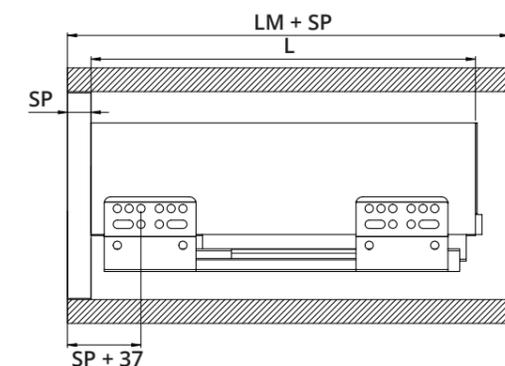

Foratura fianco con frontale interno
Side panel hole drilling with inner drawer front

Codice Code	Finitura sponda Slim box finishing	L	LM
SP-SL-199 L 30 - 3D		300	310
SP-SL-199 L 35 - 3D		350	360
SP-SL-199 L 40 - 3D		400	410
SP-SL-199 L 45 - 3D		450	460
SP-SL-199 L 50 - 3D		500	510
SP-SL-199 L 55 - 3D		550	560